




# Rack Mount ICM

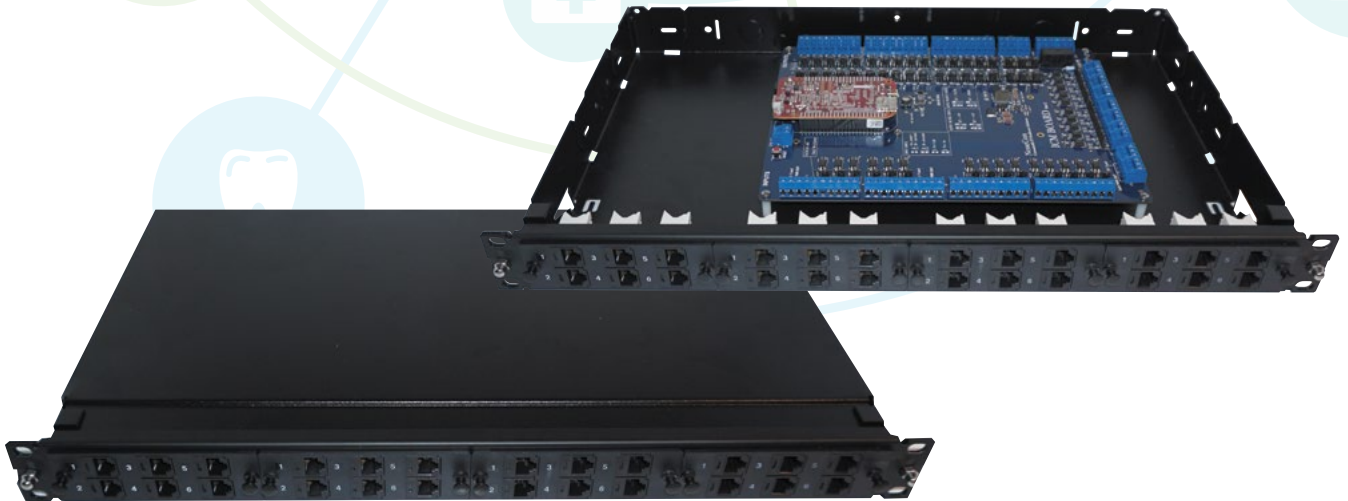

- Standard RJ 45 interface for call points and overdoor lights.
- Rugged single RU design with opto-isolated inputs.
- Available in single/dual card configuration.
- Perforated sides for cross flow ventilation.
- IP configurable with Status Indicators.

TGA Register  
RCM Approved  
AS/NZS 61000.6.3.2012

## General description

The rack mount ICM supports:

- Manages 60 inputs & 60 outputs
- Low power consumption
- Fully IP controlled & monitored
- Supports new & legacy call points

## Specifications:

- 24V DC Powered.
- Dimensions 1RU x 350mm deep.

## Accessories:

- RCP for single cable to the room cabling topology.
- NESS-PSU 24 V 7AMP power supply.

## Part numbers:

- NESS-ICM-03  
Single card
- NESS-ICM-04  
Dual card